


# N-Type

# MORE ENERGY

More Energy, More Power

## 700W MBB Bifacial Double Glass Mono Half-cell Module G12-132GANT 680~700W

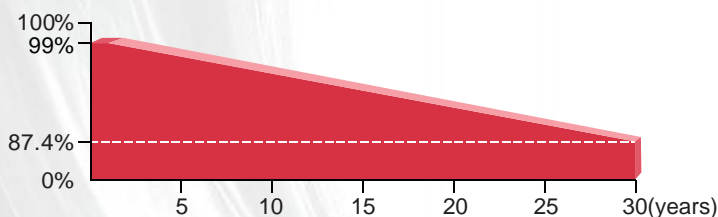


### More Energy's linear performance warranty

12 Years Product Warranty on Materials and Workmanship

30 Years Linear Performance Warranty

0.40% Subsequent Annual Degradation

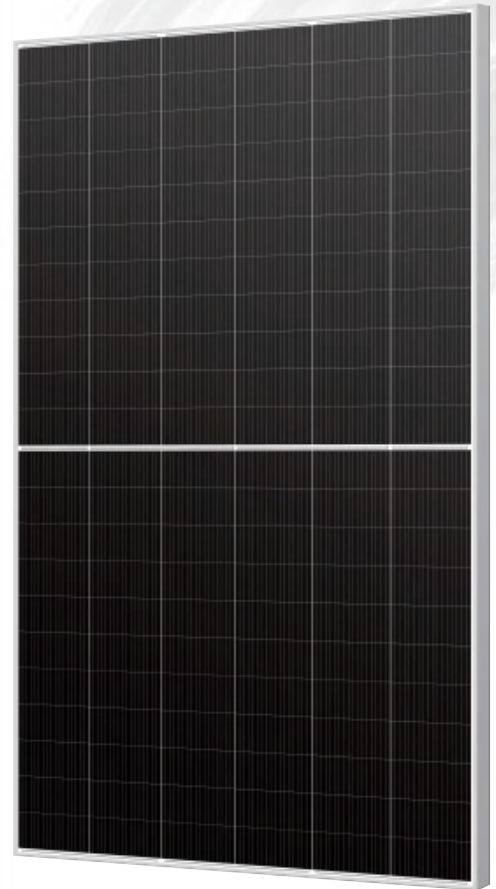

- ▲ Higher output power
- ▲ Module efficiency up to 22.53%
- ▲ Lower temperature coefficient
- ▲ Up to 30% additional power gain from back side depending on albedo



- ▲ ISO9001:2015 Quality Management system
- ▲ ISO14001:2015 Environmental Management System
- ▲ ISO45001:2018 Occupational Health and Safety Management System



- ▲ Lower LCOE (Levelized Cost Of Energy)
- ▲ High Power output lead to lower BOS cost



Excellent Potential Induced Degradation Resistance



- ▲ Salt Mist Corrosion Protect
- ▲ Ammonia Resistance



Excellent Wind Load 2400Pa&Snow Load 5400Pa Under Certain Installation Method

Hotline&WhatsApp: + 49 15 225 20 30 30

Web: [www.more-energy.net](http://www.more-energy.net) E-Mail: [info@more-energy.net](mailto:info@more-energy.net)

Add: Fürtherstr. 38, 90429 Nürnberg, Germany



# ME680~700M12-132GANT

## Electrical Characteristics(STC\*)

Power Output(Wp)	680	685	690	695	700
Max Power Tolerance(W)	0-5	0-5	0-5	0-5	0-5
Module Efficiency(%)	21.89	22.05	22.21	22.37	22.53
Voltage Mpp-Vmpp(V)	38.55	38.74	38.94	39.13	39.33
Current Mpp-Impp(A)	17.64	17.68	17.72	17.76	17.80
Voltage Open Circuit-Voc(V)	46.50	46.69	46.88	47.07	47.26
Short Circuit Current-Isc(A)	18.69	18.74	18.79	18.84	18.89

\*STC:Irradiance 1000 W/m<sup>2</sup>,Environment Temperature 25°C,Air Mass AM1.5

## Electrical Characteristics(NMOT\*)

Power Output(Wp)	513	517	521	525	529
Voltage Mpp-Vmpp(V)	36.15	36.36	36.56	36.74	36.94
Current Mpp-Impp(A)	14.19	14.22	14.25	14.29	14.32
Voltage Open Circuit-Voc(V)	44.37	44.56	44.75	44.94	45.13
Short Circuit Current-Isc(A)	15.05	15.09	15.13	15.17	15.21

\*NMOT:Irradiance 800 W/m<sup>2</sup>,Environment Temperature 20°C,Air Mass AM1.5


## Electrical Characteristics(NMOT\*)

Power Gain(%)	Power Output(Wp)	Voltage Mpp-Vmpp(V)	Current Mpp-Impp(A)	Voltage Open Circuit-Voc(V)	Short Circuit Current-Isc(A)
10	759	38.94	19.49	46.88	20.67
15	794	38.94	20.38	46.88	21.61
20	828	38.94	21.26	46.88	22.55
25	863	38.94	22.15	46.88	23.49
30	897	38.94	23.04	46.88	24.43


## Mechanical Data

Dimension Of Module	2384*1303*35mm
Weight(kg)	38
Front/Back Glass	2.0mm heat strengthened glass
Cables	4mm <sup>2</sup> /300mm or Customized Length
Junction Box	IP68,3 Bypass-Diode
Connector	MC4 compatible


## Module Back View

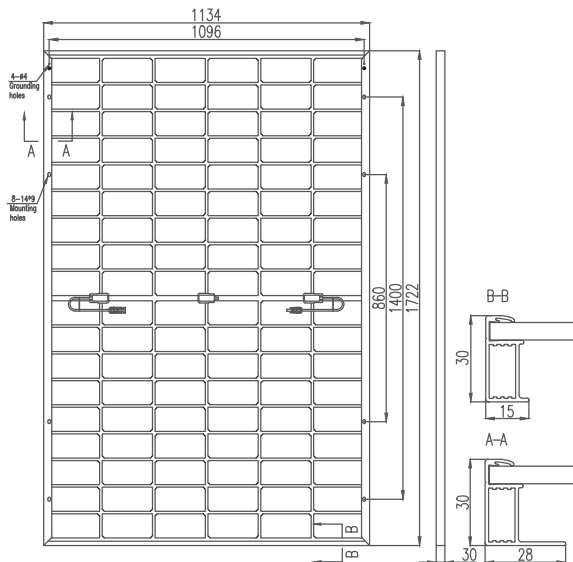

## I-V Curves(425W)

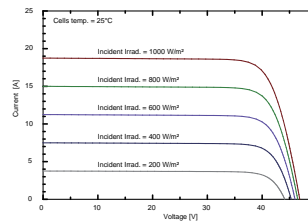

## P-V Curves(425W)

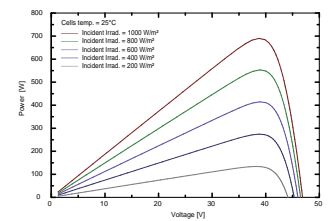

## Mechanical Data

Loading Capacity	558 pcs/40'HQ
------------------	---------------

## Working Conditions

Max System Voltage(VDC)	1500V
Max Series Fuse Rating	30A
Maximum Load Capacity	Snow 5400Pa/Wind 2400Pa
Operating Temperature	-40 C ~+85 C
Safety Class	II
Power Bifaciality	75±5%

## Working Conditions

Temperature Coefficients of Isc(%/C)	0.046
Temperature Coefficients of Voc(%/C)	-0.26
Temperature Coefficients of Pmpp(%/C)	-0.310
NMOT	42±2 C